


APPROVED 100. FIG. 4  
 BY 248 68-1  
 DRAFTED 68-1



5316243

07 ~~678131~~  
 984 246

FIG. 1

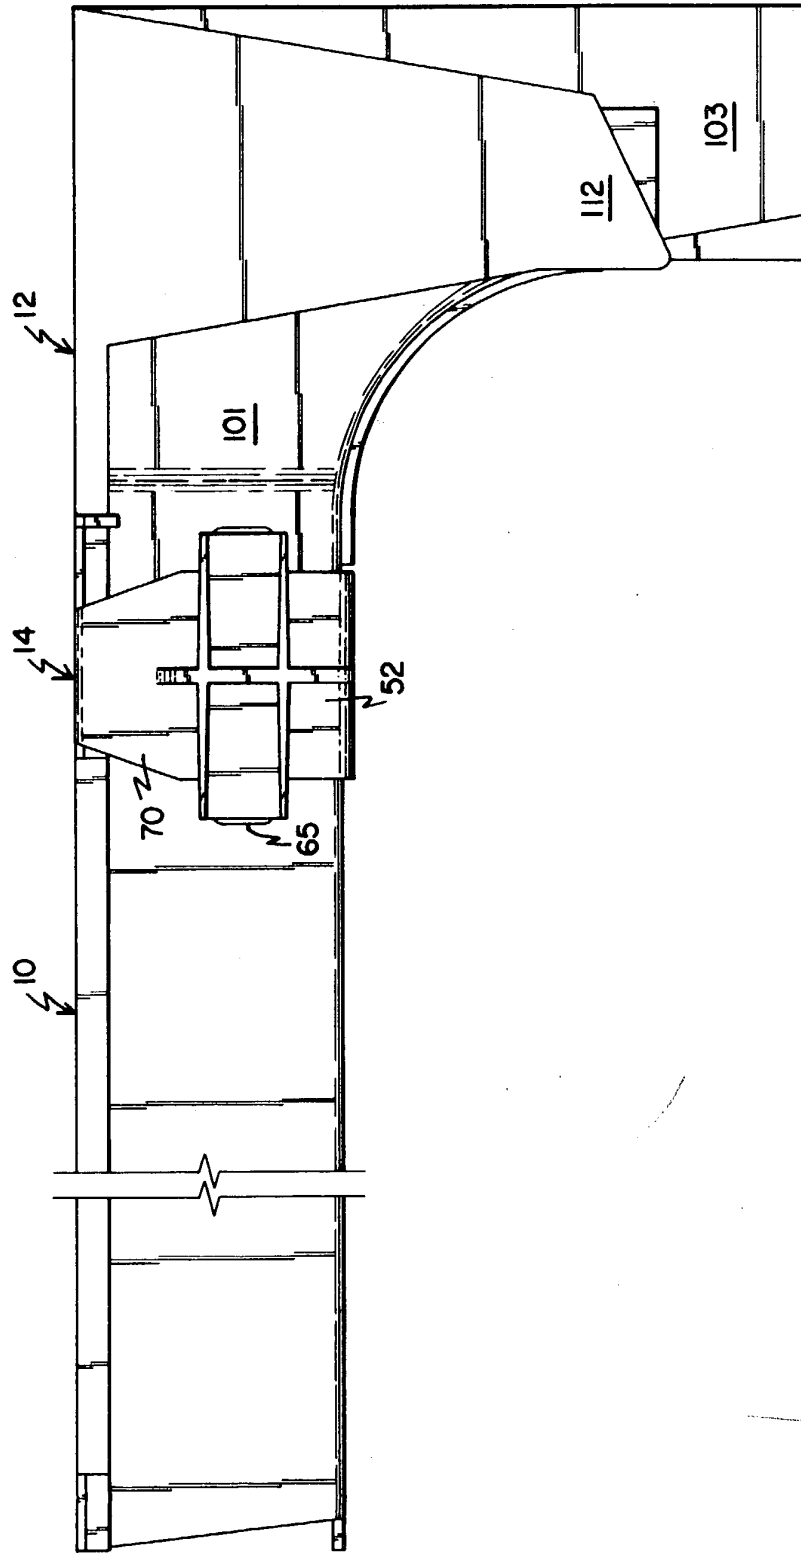

1978

FIG. 2

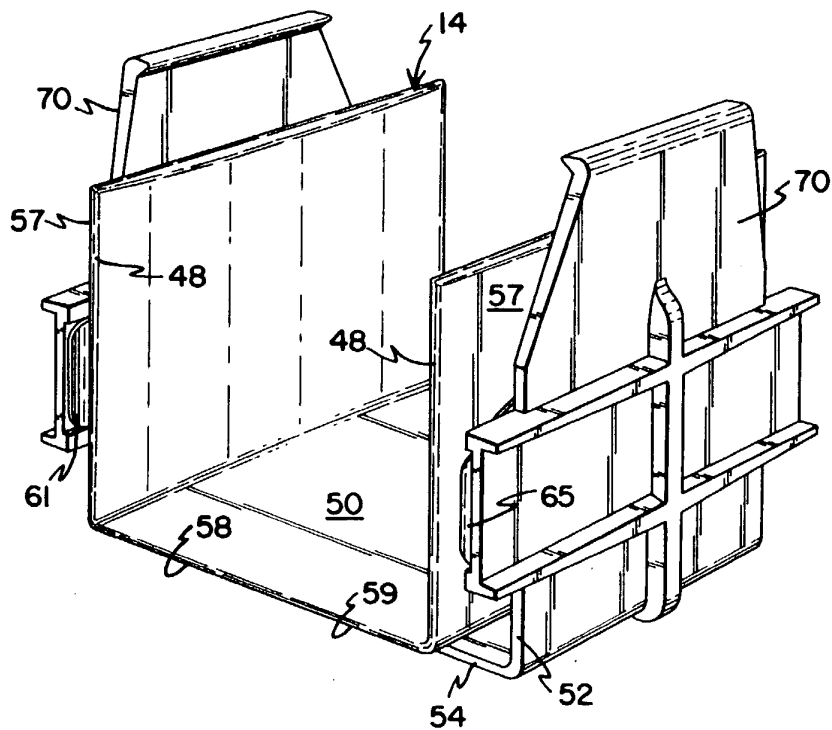


FIG. 3


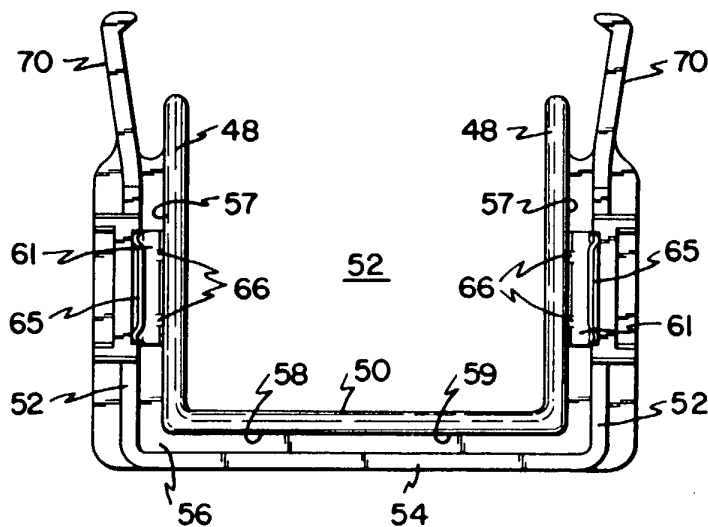


FIG. 4

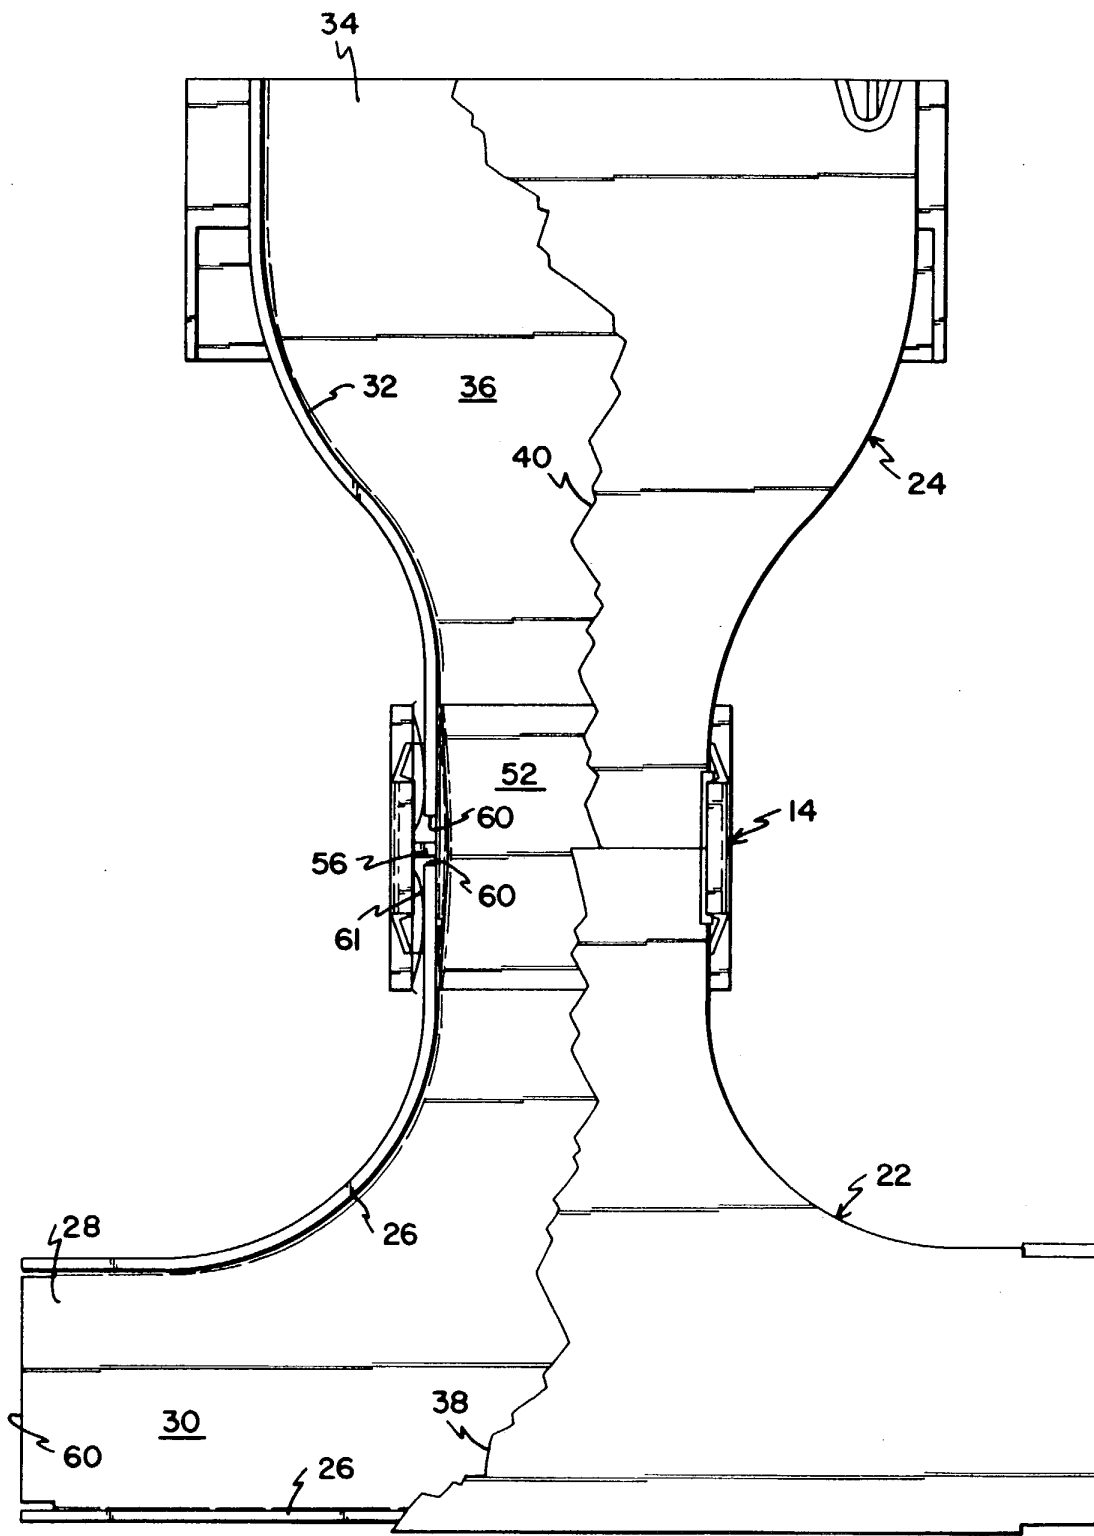

APPROVED U.S. PAT. & TM. OFFICE  
BY CLASS  
DRAFTSMAN

FIG. 5

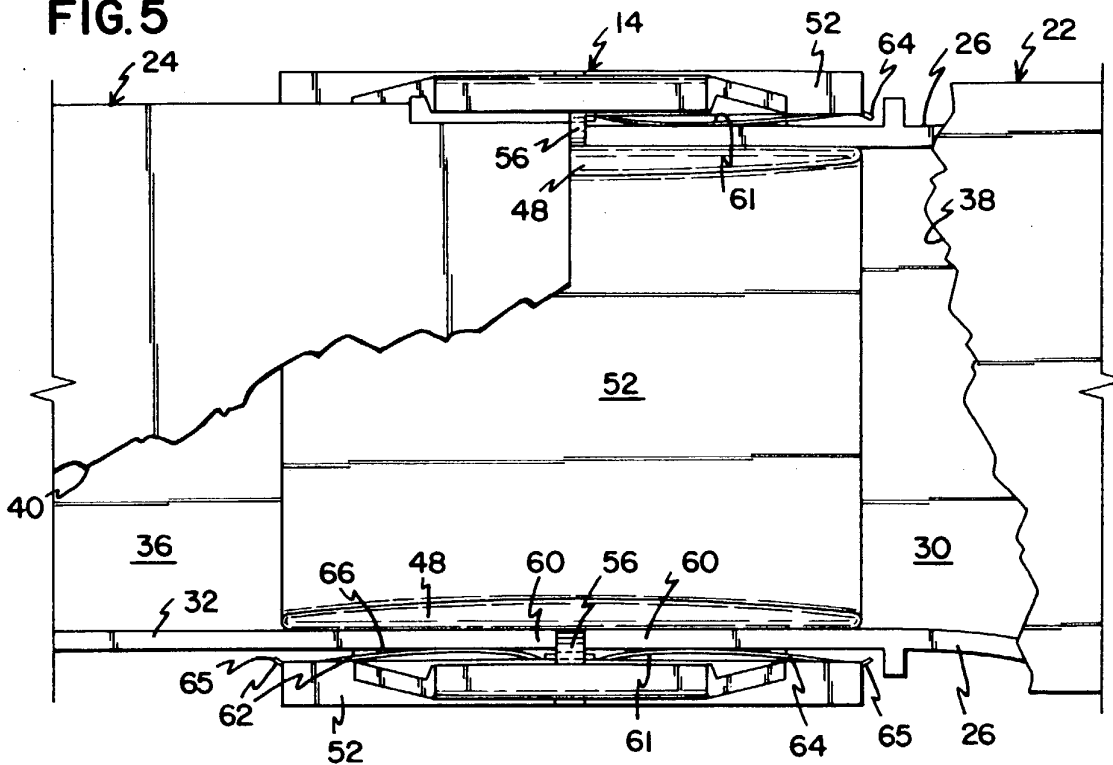


FIG. 6

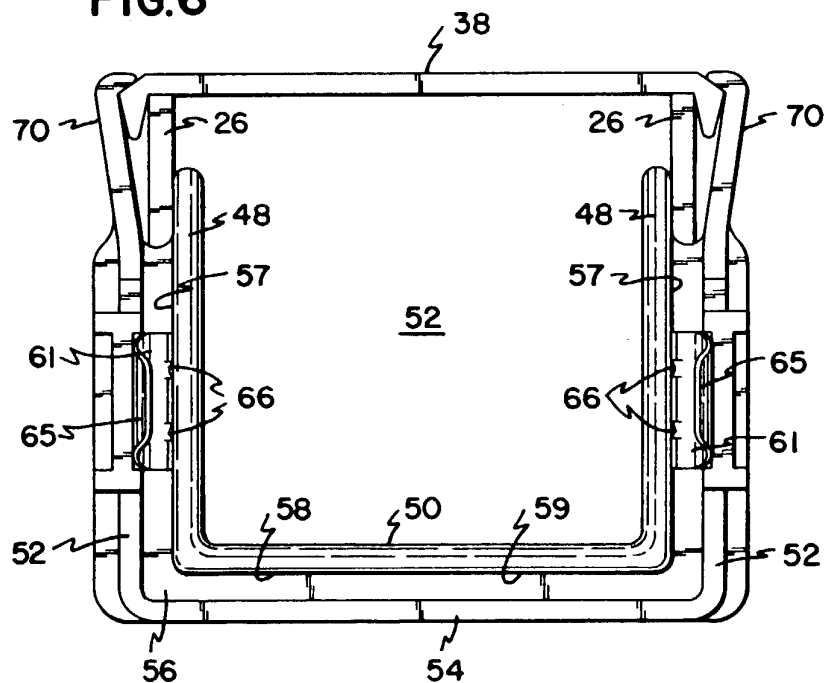


FIG. 7

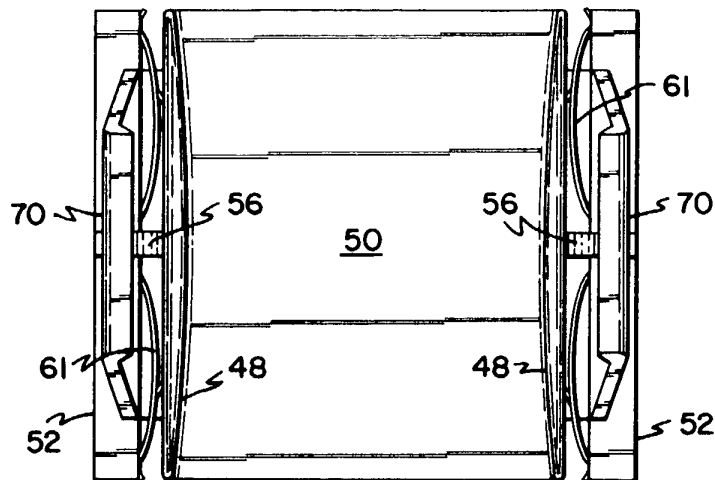


FIG. 8


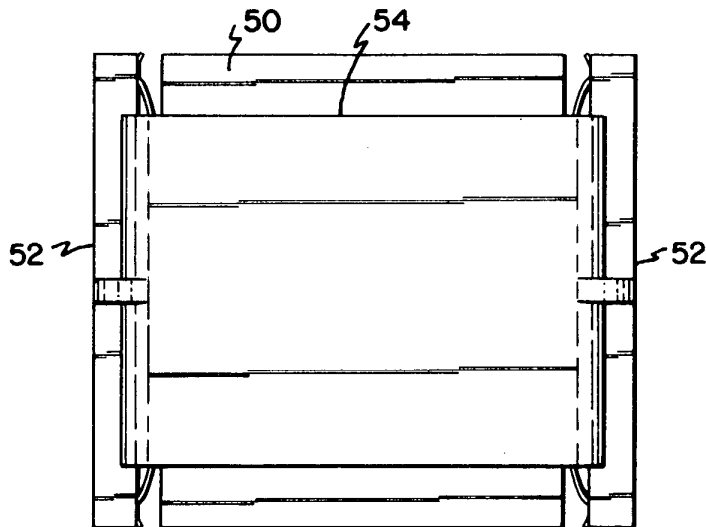


FIG. 9

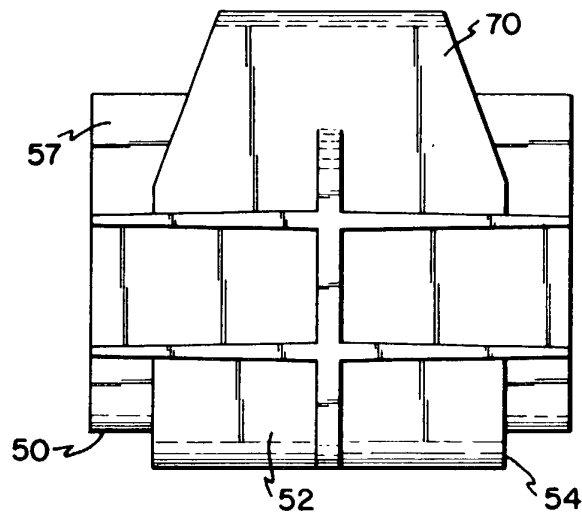

984246  
07 678131

FIG. 10

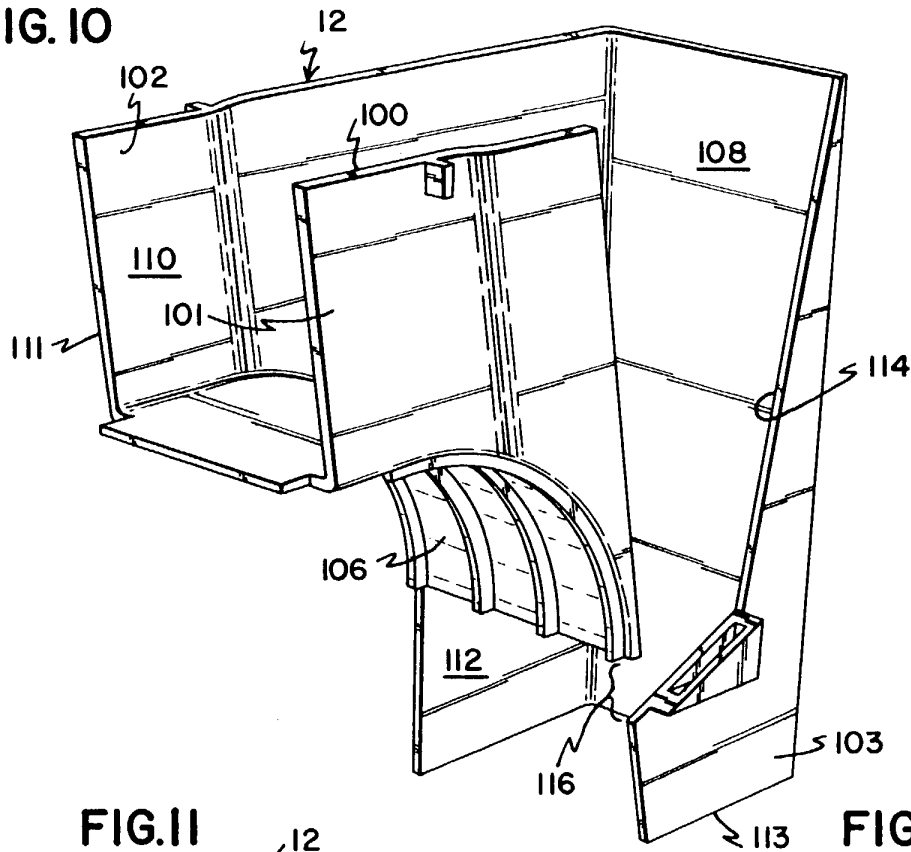


FIG. 11


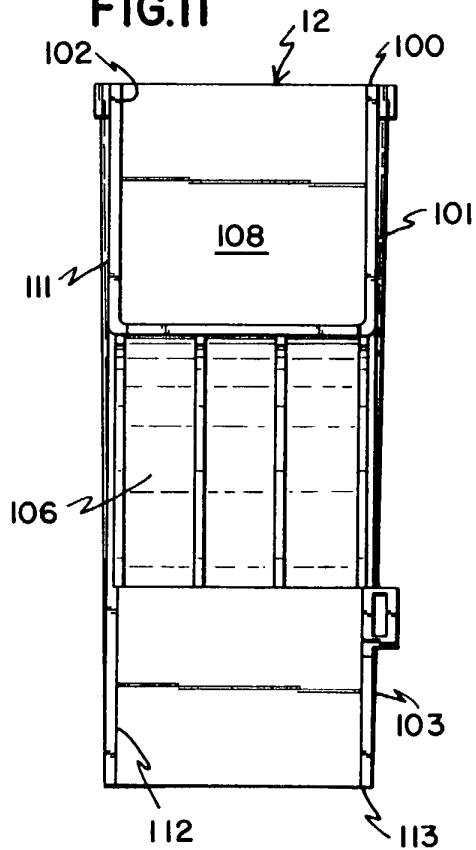


FIG. 12

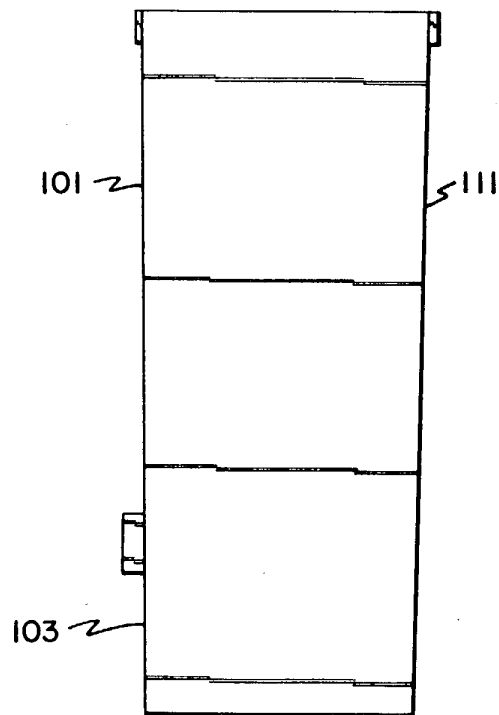

APPROVED FOR PUBLICATION  
BY [Signature]  
DRAFTSMAN

984 246  
07 ~~678131~~

FIG.13

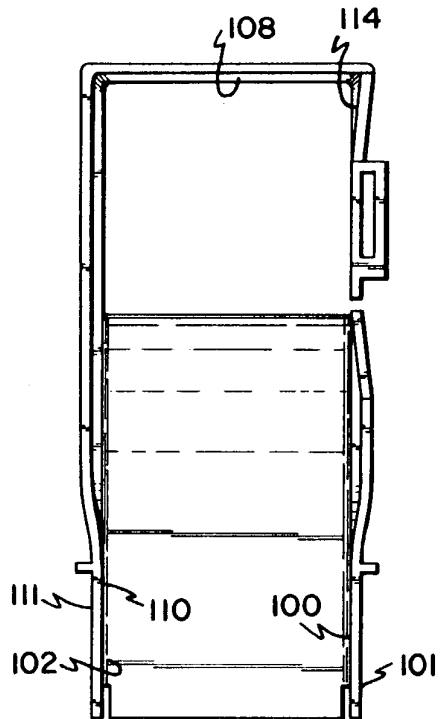


FIG.14


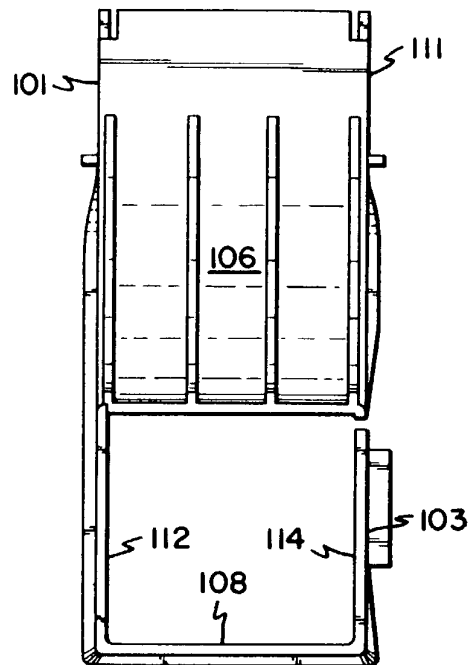


FIG.15

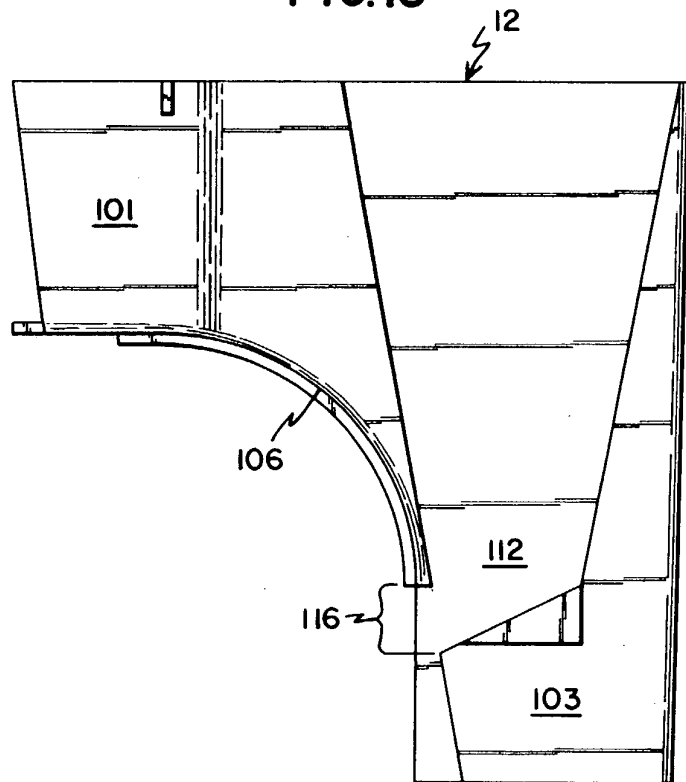

APPROVED 10.0. FIG.  
BY [signature]  
CLASS  
DRAFTSMAN

984241  
07 ~~678131~~

FIG. 16


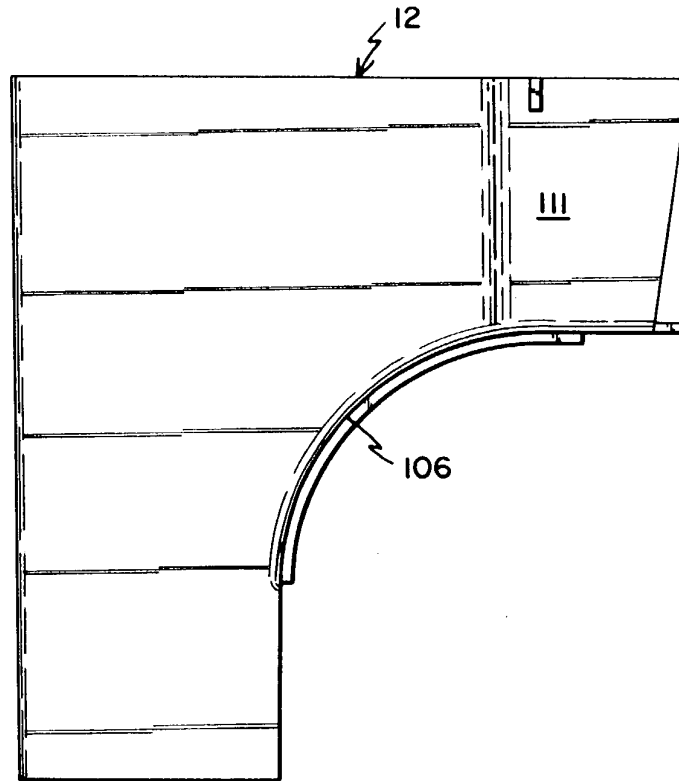


FIG. 5A



APPROVED FOR FIG.  
BY [Signature]  
DRAFTSMAN

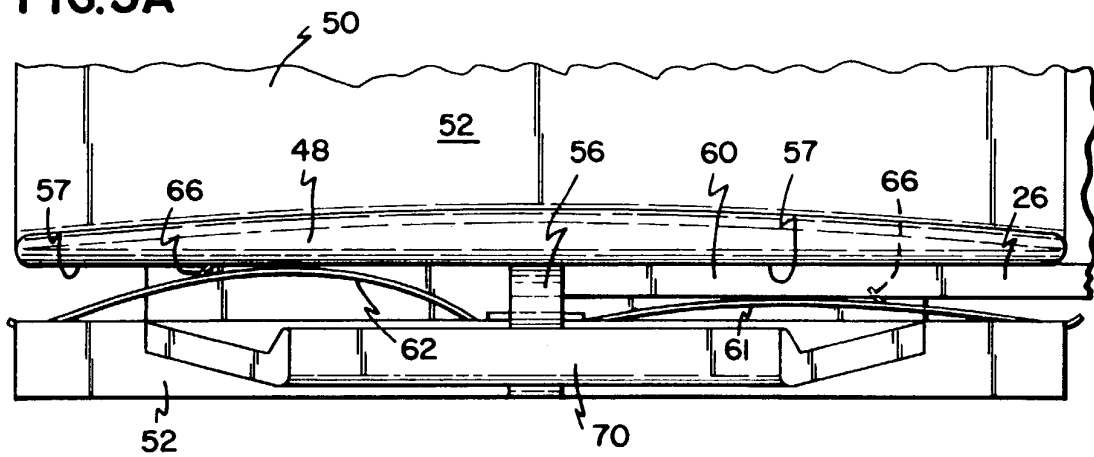

984246  
07-678131




FIG. 18 is a cross-sectional view of a mechanical assembly. It features a base 74 with a central cavity 80. Two vertical tubes 16 are mounted on the base. A central component 18 is positioned between the tubes. Various fasteners and components are labeled with numbers: 76, 84, 80, 90, 82, 78, 86, 92, 62, and 20.